



## LED EMERGENCY REMOTE HEAD

HY-RH-1(WH)



HY-RH-2(WH)



### Certification



### Description


This remote lamp-head unit easily enhances your emergency lighting when connected to any emergency fixture with remote head capability. Its housing is injection-molded from engineering-grade thermoplastic, featuring 5VA flame-retardant and high impact resistance.

### Specifications

Model NO	HY-RH-1(WH)	HY-RH-2(WH)
Lamp Head(s)	1 lamp head	2 lamp heads
Equipped with	12 Pcs SMD 2835 LEDs	24 Pcs SMD 2835 LEDs
Wattage	Max 1.2W	Max 2.4W
Lumen Output	120 LM	240 LM
Input Voltage	3.6-9.6Vdc	
Housing Material	Thermoplastic	
Canopy Material	Aluminum	
Finish	White	
Mounting Option	Ceiling / Wall Mount	
Recommended Mounting Height	9.75ft	13.29ft
Application	Indoor	
Suitable for Wet Location	Yes	
Operating Temperature	32°F – 104°F (0°C-40°C)	
Warranty	5-year	

### Dimensions

HY-RH-1(WH)

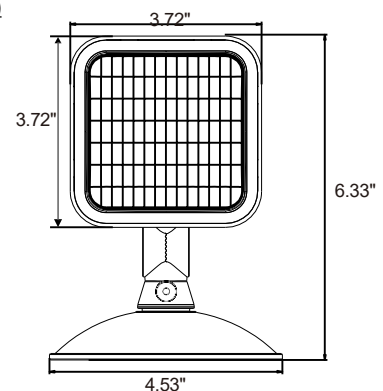

HY-RH-2(WH)

