



HONYA Lighting

Project Name: _____

Date: _____ Note: _____

LED UFO High Bay - UFO2 Series



Application: Ideal for warehouse, gym, convention center and other commercial and industrial space

Product Description

This UFO2 Series UFO High Bay has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation. Motion sensor base is pre installed for quick installation and more energy saving. 0-10V dimming to meet different light output needs.

Certifications



PF 0.9

CRI ≥80



SPECIFICATIONS

Model No.	HYA-UFO2-100W-H-50K	HYA-UFO2-150W-H-50K	HYA-UFO2-200W-H-50K	HYA-UFO2-240W-H-50K
Wattage	100W	150W	200W	240W
Lumens	14000	21000	28000	33600
HID Equivalent	250W	400W	750W	1000W
Rated Input Voltage(V)	AC100-277V			
CCT	5000K			
Dimming	0-10V			
CRI	≥80			
Beam Angle (°)	80°			
Protection Rating	IP65			
Lumen Efficiency	140 Lm/W			
Color Rendering Index	Ra>70			
Life Span	≥50000H			
Working Temperature	-40 ° F ~ +113 ° F / -20°C ~40°C			
Finish	Black			
DLC ID	PLRE4796ZVAF	PLOS0AJC2OQ0	PLZ5DOFXU8FI	PL6J85U80UZS
Package Info	12.20"x12.20"x6.77"	12.99"x12.99"x7.05"	15.35"x15.35"x7.40"	
PC/ Master Pack	1	1	1	
Weight	7.94 LB	10.14 LB	14 LB	

FEATURE




Built in sensor base
Easy Twist on Sensor Installation

ORDERING CODE DEFINITION


EXAMPLE: HYA-UFO2-100W-H-50K

Company Code	Product	Watt	H	CCT
HYA	UFO2: UFO2 Series UFO High Bay	100W 150W 200W 240W	H: High Lumen Efficiency 140LM/W	50K: 5000K

PRODUCT DIMENSION

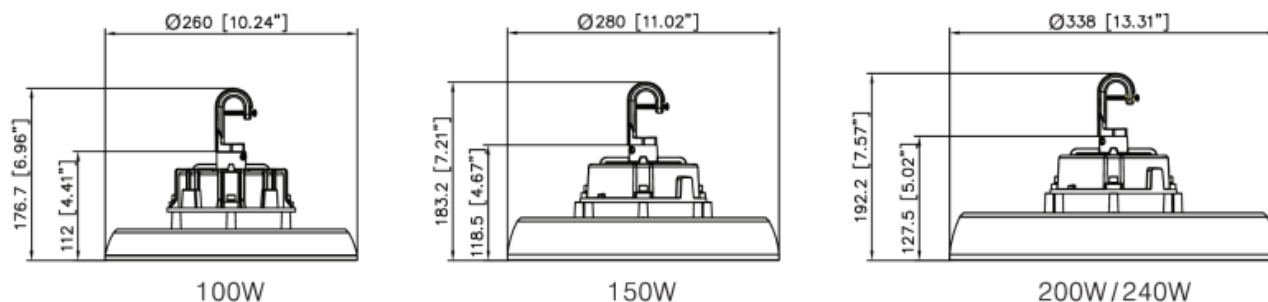


WIRING GUIDE

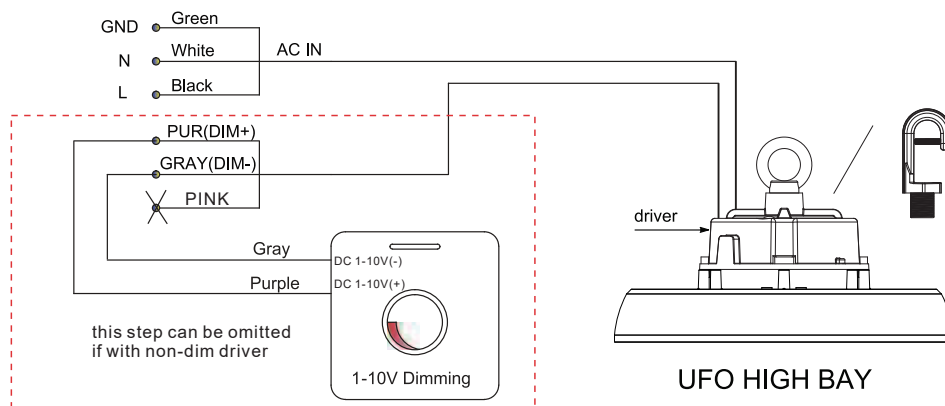

PHOTOMETRIC REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

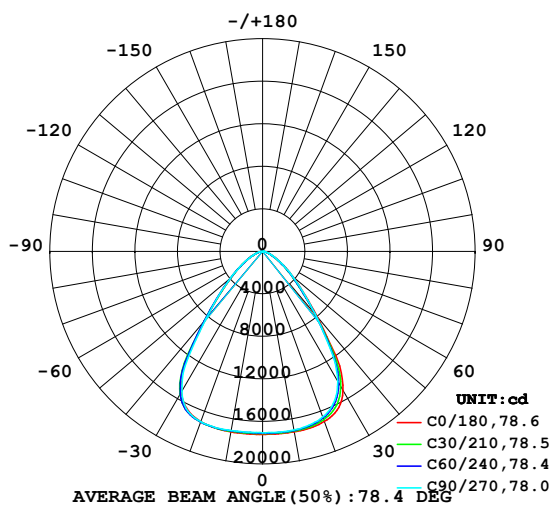

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

