



LED Outdoor Wall Sconce - MWP02 Series



Application: Perfect for indoor and outdoor locations such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

Certification




Feature



Selectable CCT
3000K-4000K-5000K

Selectable Wattage
12W-14W-16W
18W-20W-22W

Dimension

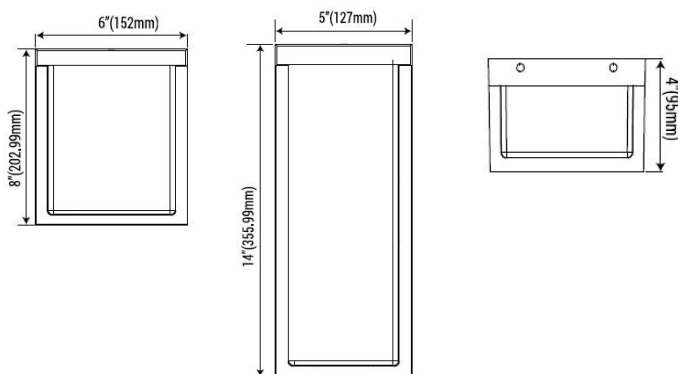

Specifications

Model	HYA-MWP02-0864-H-3W3CCT(PTC)	HYA-MWP02-1454-H-3W3CCT(PTC)
Wattage	12W-14W-16W	18W-20W-22W
Size	W6"xH8"xD4"	W5"xH14"xD4"
Lumen Output	1742 lm	2619 lm
Input Voltage	AC100-277V 50/60Hz	
CCT	3000K-4000K-5000K Selectable	
Beam Angle	125°	
CRI	Ra>80	
Working Temperature	~4°F ~+113°F / ~20°C ~+40°C	
Environment Location	WET LOCATIONS (IP66)	
Lens	White Acrylic	
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours	
Lamp Shell	Oil Rubbed Bronze	
Accessories Option	PC: Photocell Control Pre-Installed (can be turned off)	
PCS/BOX	10	10
Master Box Dimension	515mmx32mmx225mm / 20.3"x12.6"x8.9"	515mmx285mmx375mm / 20.3"x11.2"x14.8"
Master Box Weight	6.8KG / 15.21LB	8.3KG / 19.30LB