



Project Name: \_\_\_\_\_  
 Date: \_\_\_\_\_ Note: \_\_\_\_\_

## LED T8 Tube - 8FT



**Application:** Supermarket / subway/ office / shopping mall / hotel/  
 hospital / school / showrooms ...




### FEATURE

- Aluminum housing, Suitable for damp location; Working temperature: - 4°F ~+104°F / -20°C ~+40°C
- Beam Angle: 180°; CRI>80; PF>0.9
- High energy efficiency: save more than 60% energy versus T8 fluorescent lamps and Lumen Maintenance over 70% @ 50,000+ Hours
- RoHS Compliant - Mercury Free: eliminate disposal problems

### SPECIFICATION

Model	Length	Watt	CCT	Lumens	Base	Voltage
HY-T8-36P8FT-B4000K (FA8-F)	8ft	36W	4000K	4680 lm	FA8/Single Pin	120-277V
HY-T8-36P8FT-B5000K (FA8-F)	8ft	36W	5000K	4680 lm	FA8/Single Pin	120-277V
HY-T8-36P8FT-B5000K (FA8-T)	8ft	36W	5000K	4680 lm	FA8/Single Pin	120-277V
HY-T8-36P8FT-B5000K (R17D-F)	8ft	36W	5000K	4680 lm	R17D	120-277V
HY-T8-36P8FT-B5000K (R17D-T)	8ft	36W	5000K	4680 lm	R17D	120-277V
HY-T8-50P8FT-B6500K (FA8-T)	8ft	36W	6500K	6500 lm	FA8/Single Pin	120-277V

### INSTALLATION

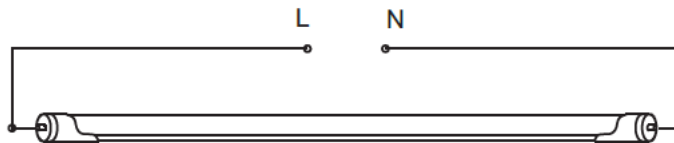

### PACKAGE INFO

Model	Length	QTY/PACK	PACKAGE SIZE	PACKAGE WEIGHT	PACKAGE CBM	40HQ Capacity
HY-T8-36P8FT-B4000K (FA8-F)	8ft	25 PCS/PACK	2425X190X170mm 95.47"X7.48"X6.69"	15.5kg/34.17 lbs	0.078328	~21790PCS
HY-T8-36P8FT-B5000K (FA8-F)						
HY-T8-36P8FT-B5000K (FA8-T)						
HY-T8-36P8FT-B5000K (R17D-F)						
HY-T8-36P8FT-B5000K (R17D-T)						
HY-T8-50P8FT-B6500K (FA8-T)						